

FIG._1

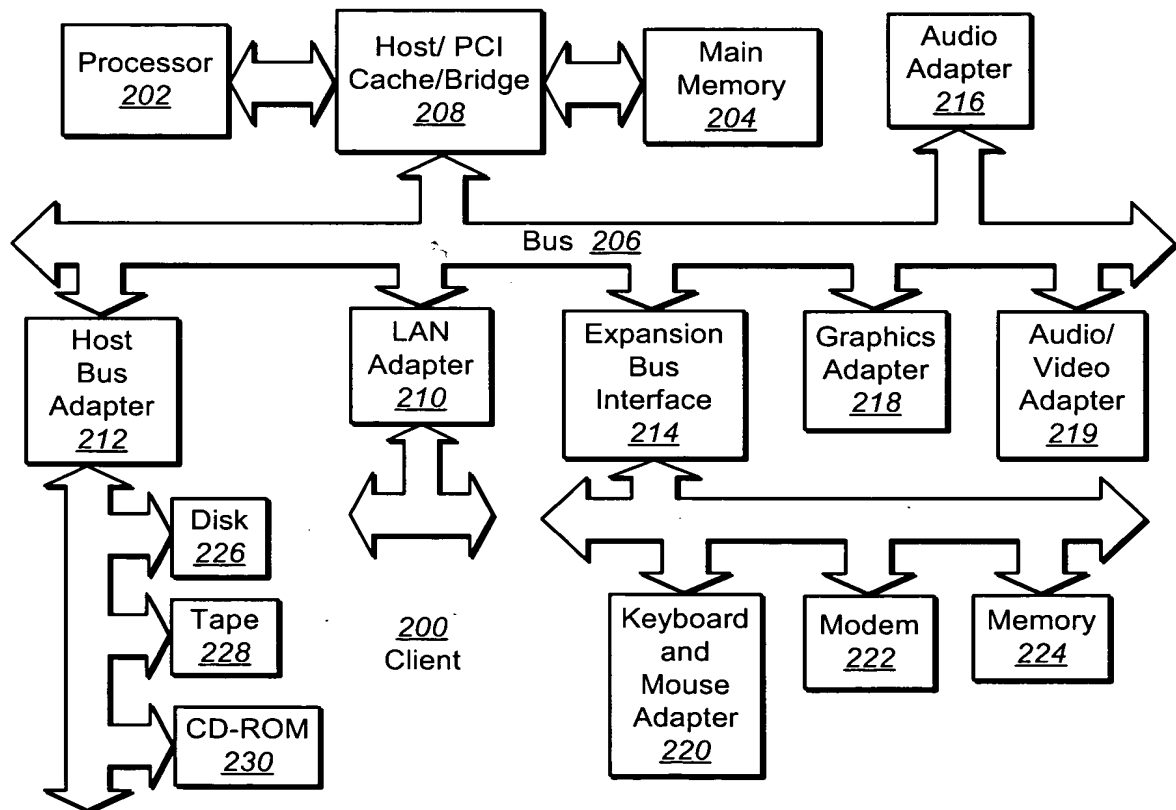
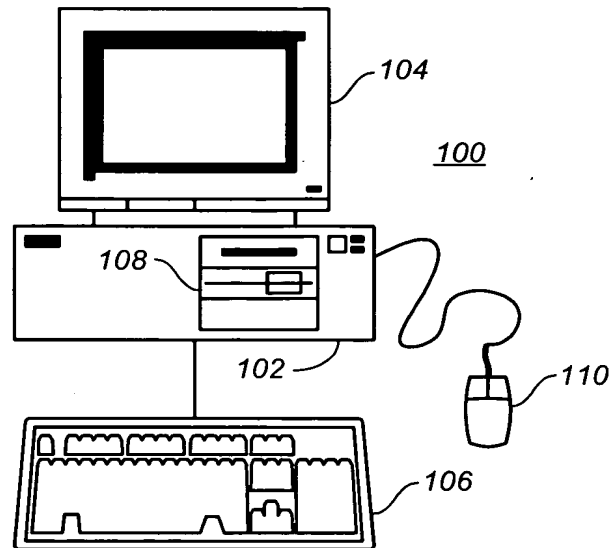
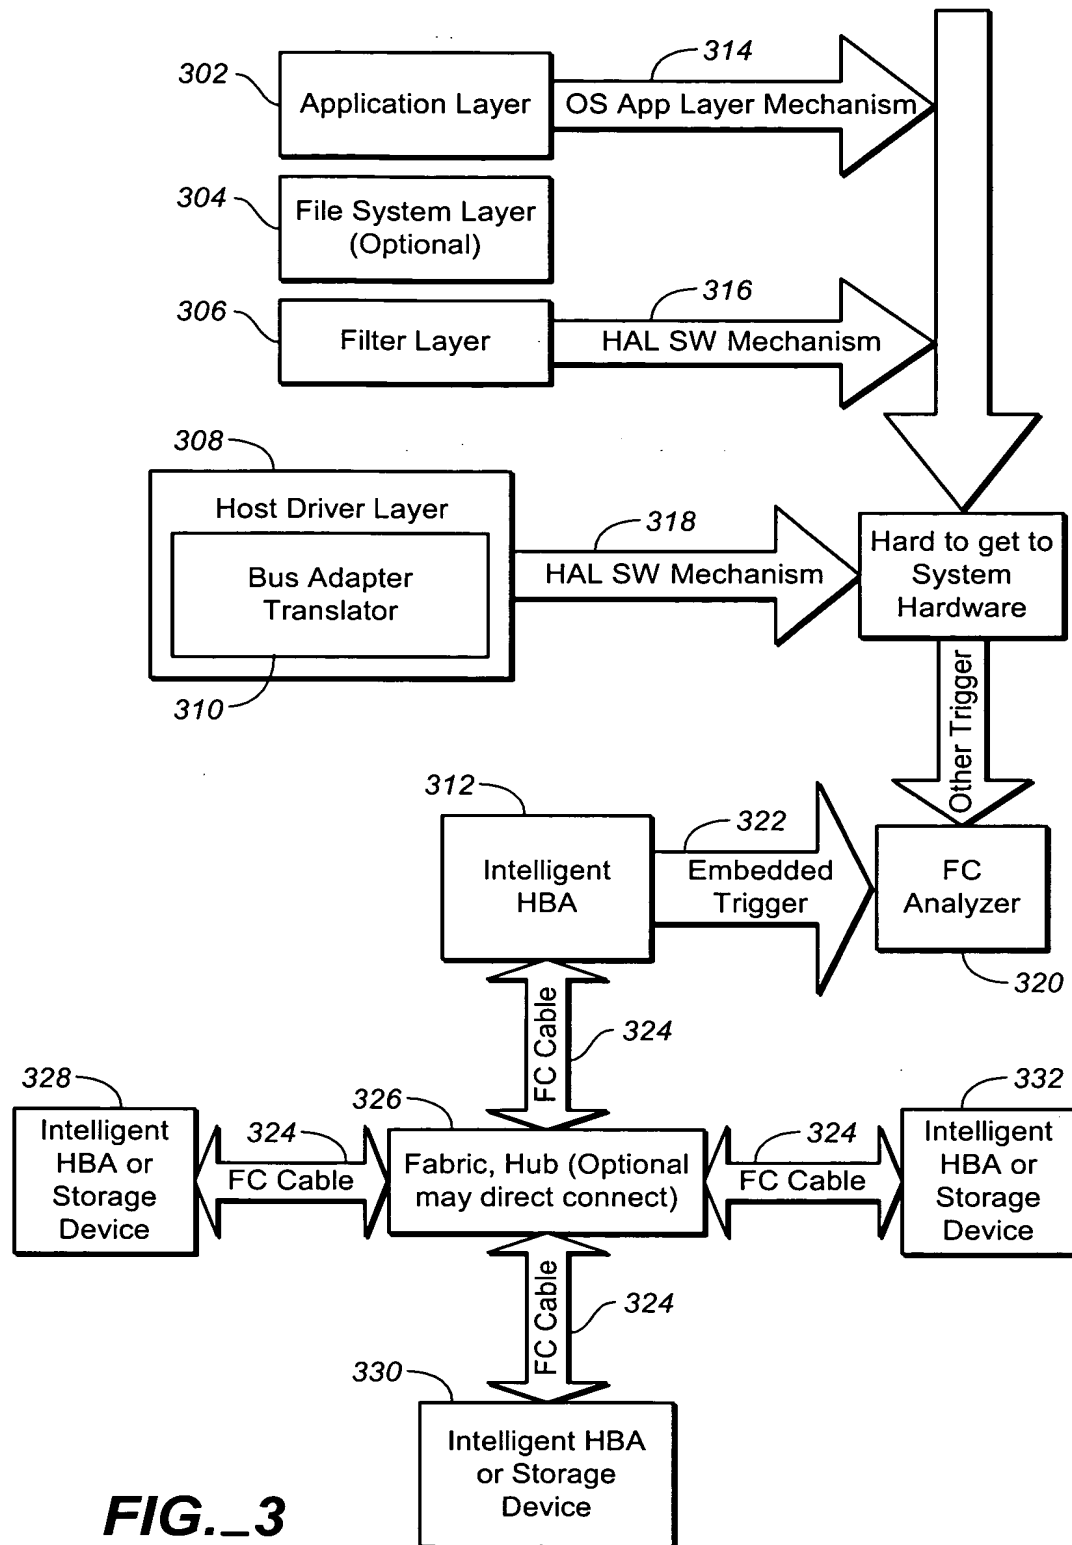


FIG._2



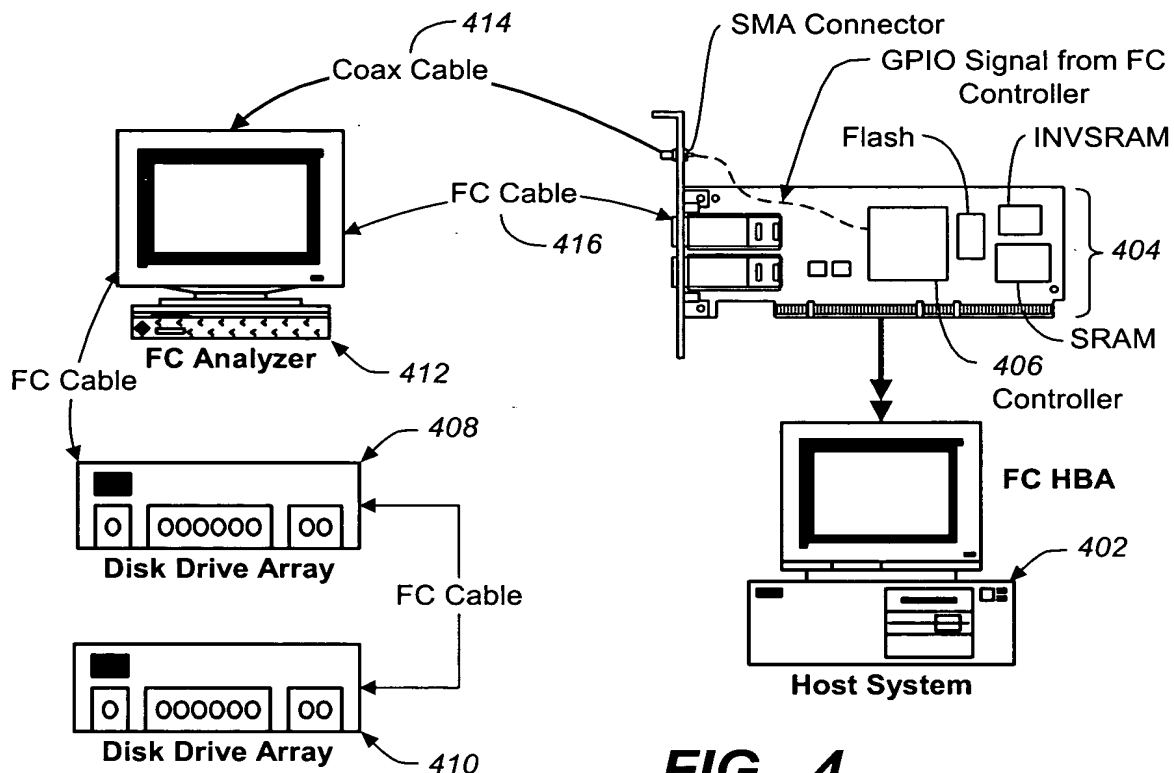


FIG._4


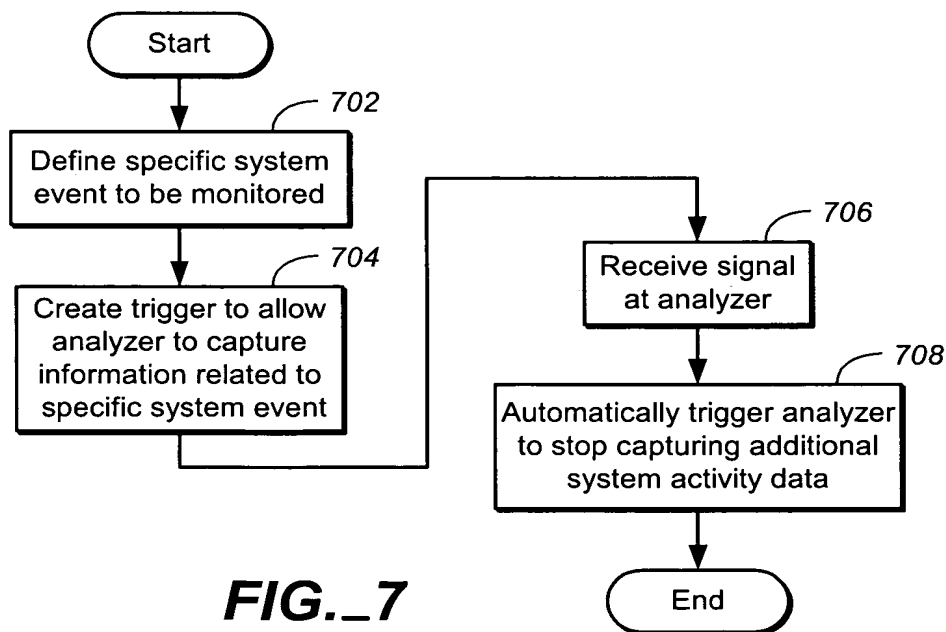


FIG._7

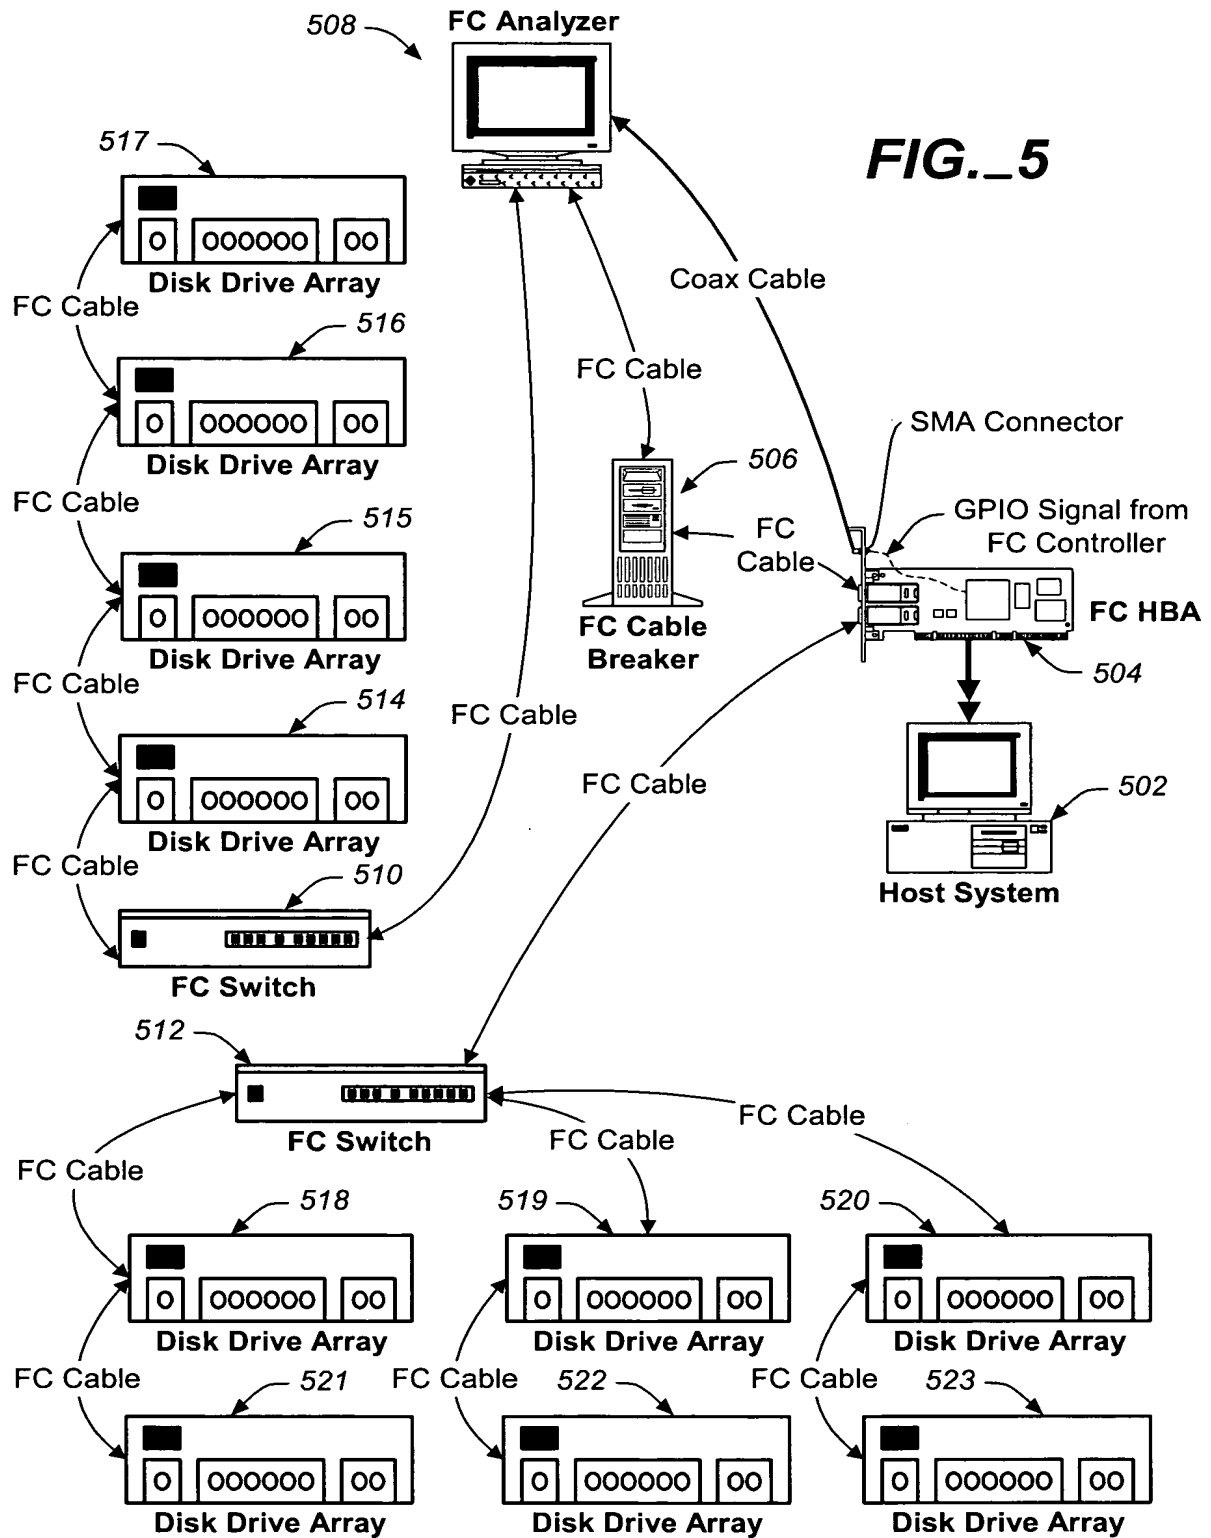

Method to Provide External Observability When
Embedded Firmware Detects Predefined Conditions

5 / 5

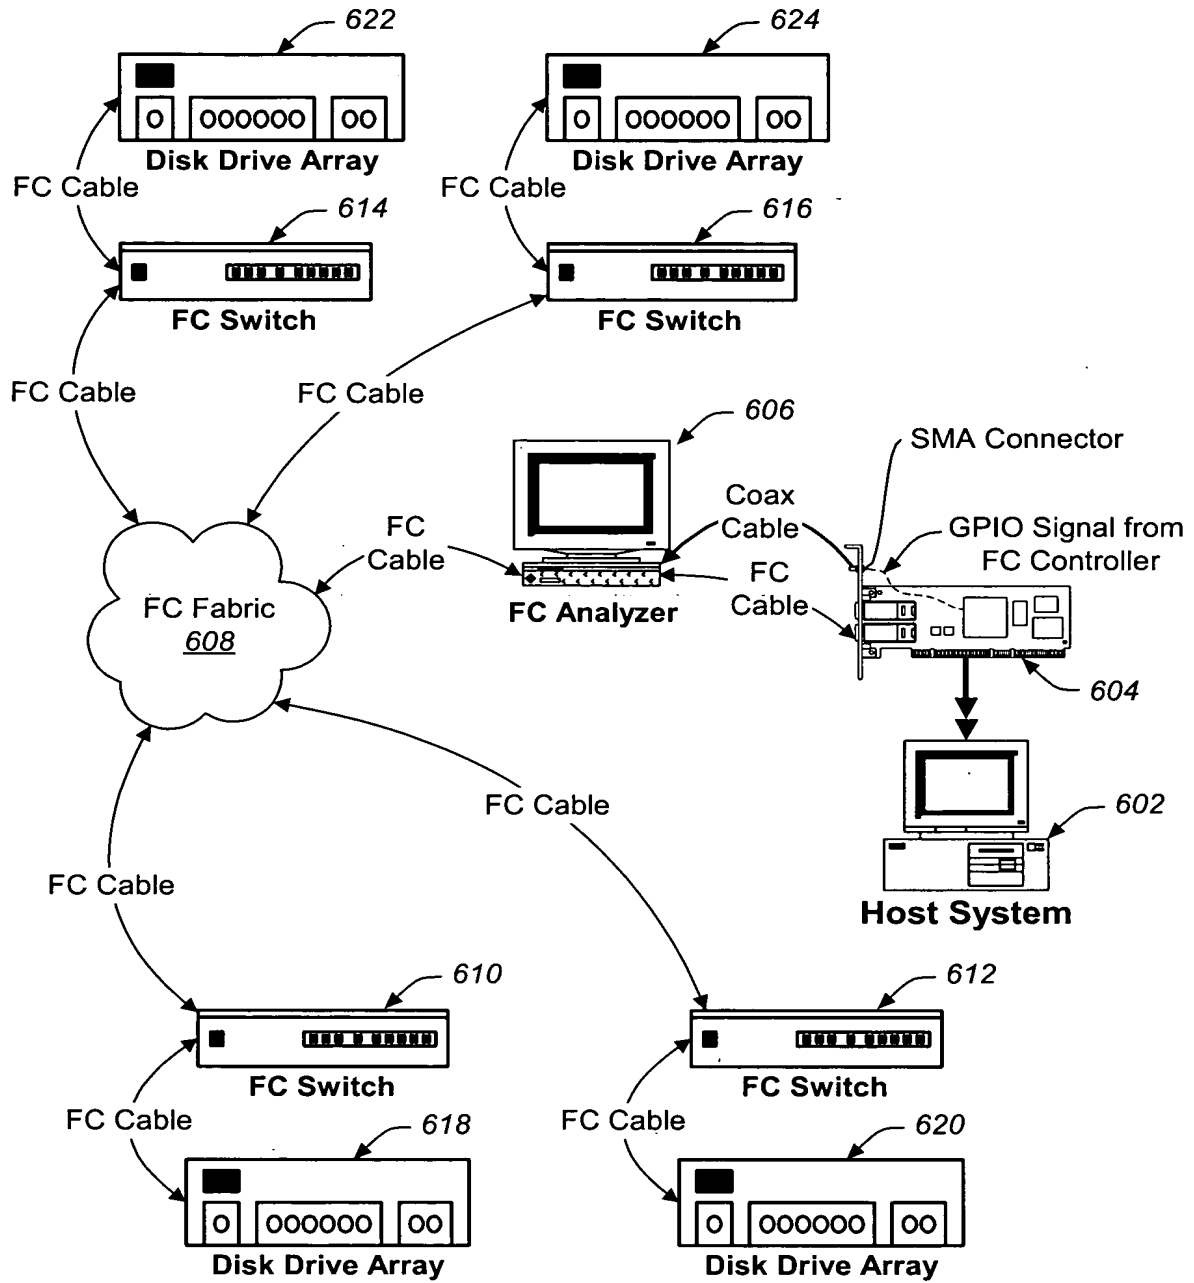


FIG._6